

## REVERSE COALX

Small size filter elements designed for oil removal from lubricated vacuum pump exhaust air.

“**REVERSE COALX**” filter elements are manufactured with EXTRUDED MICROFIBER OF BOROSILICATE, to remove mist and aerosols of oil from exhaust air.


Oil particles are captured by the fibers of the filter media and when condensed in bigger drops are pushed out. The biggest drops, by gravity effect, come down to the lower part of the filter element and are collected in a sump.

### CHARACTERISTIC

Filter media available	C1	C2	S1
Filter material	Microfiber of borosilicate PVDF binder		Microfiber of borosilicate Silica binder
Max. temperature	150°C		450 °C
Filtration grade	0,1 micron		
Efficiency removal particles	99,99 %	99,5 %	99,99 %
Residual oil at 20 °C	da 1 a 5 mg/mc		

### MODELS

Filter element	Dimensions mm		
	A	B	C
<b>RCX-19 041-C1</b>	41	19,5	12
<b>RCX-32 064-C1</b>	64	32	25,5
<b>RCX-65 230-C2</b>	230	65	51
<b>RCX-53 350-S1</b>	350	53	39

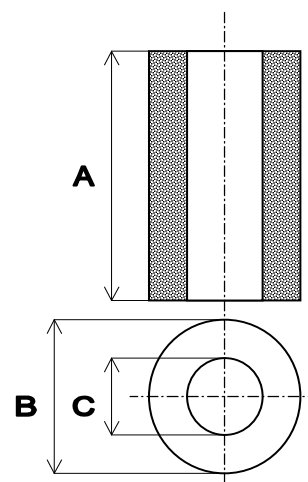

DS-RCX-832-UK-14

BEA Technologies S.p.A. reserves the right to alter specifications without prior advice.  
The user has the responsibility to determine the suitability to the product for special use and the suitability to your own using procedures.