

# TTK

## Polypropylene housings for liquid filtration

Polypropylene housings for filtration of non dangerous liquids.  
TTK housing are available in two size to fit DOE filter elements code 2001 or 2002; inside tie rod fastening make a perfect sealing between the filter element and the housing head.




### Materials

Cap and internals: polypropylene.  
Sump: reinforced polypropylene.  
Gasket: Fep/Silicone

Model	Connections	Min/Max Pressure	Min/Max Temperature	Weight	Volume	Size filter element
TTK-10-FS	3/4" GAS	ATM/8 bar	+5/50°C	2,0 Kg	1,80 L	2001
TTK-20-FS				2,5 Kg	3,20 L	2002

Nominal dimension (mm)		
A	B	C
130	345	250
130	605	500

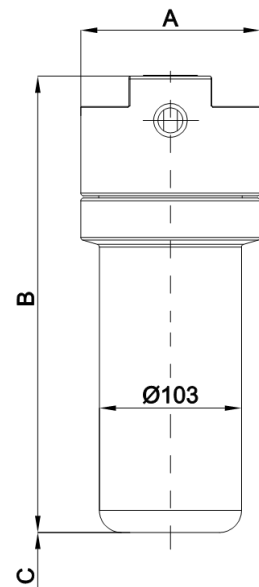

DS-TTK-A027-EN-21

Data contained in this bulletin are informative and subject to change without notice.  
User is responsible for determining whether the product is fit for particular purpose and suitable for User's method of application.