


## Beafine - HIGH EFFICIENCY LIQUID FILTER BAGS

- Micron ratings from 1.0 to 25.0
- 7 industry standard sizes
- High flow - low pressure drop media
- Wide chemical compatibility
- Excellent oil absorbing capabilities
- Optional extended life feature
- Handles on all bags
- Choice of metal ring or molded tops


### HIGH EFFICIENCY MATERIALS

Microfiber materials provide high efficiencies (95.0 % minimum) at low micron ratings. The optional addition of a needle punched felt layer provides a prefilter zone and results in extended life. The multilayer technology option results in a true graded density material with high performance levels.


Standard ring bags have a galvanized steel ring (stainless steel optional) sewn in the top of the bag. Sewn seams are standard. Molded top filter bag has a plastic top welded to a sewn filter bag.

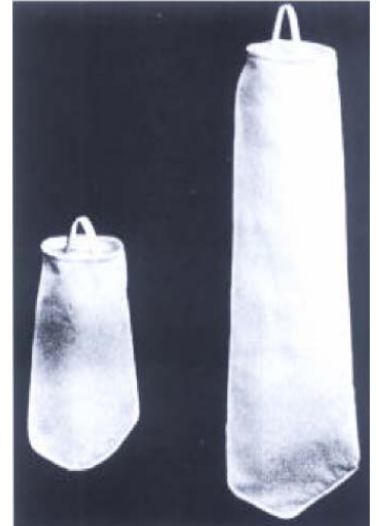

### MOLDED TOPS

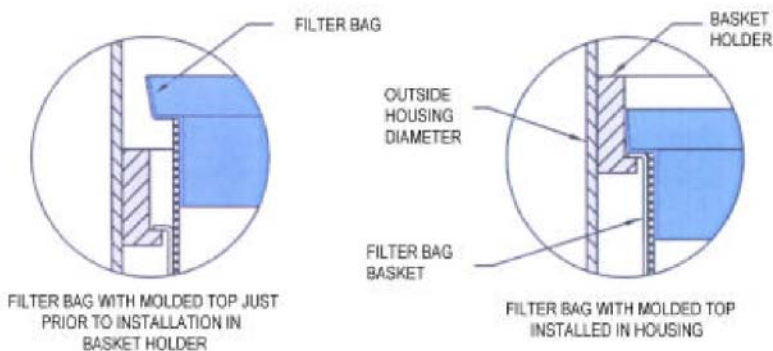

### FILTER BAG DESIGN

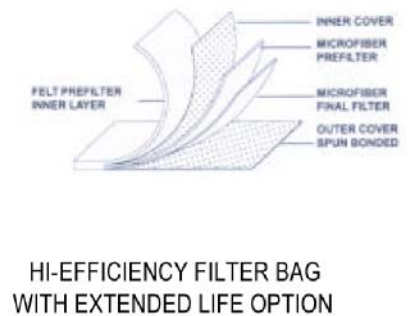

### OIL REMOVAL CAPABILITIES

Oil removal bags are available which absorb oil from aqueous solutions such as water based coolants wastewater in addition to many others. The oil removal bags are available in high efficiency ratings of 15.0 & 25.0 microns with the extended life feature optional.

**SIZES**

Filter Bag Size	Diameter (In.-Approx.)	Length (inches)	Area (ft')	Maximum Flow (gpm)
1	7.25	16.5	2.0	90
2	7.25	32	4.5	180
3	4.31	8	0.5	20
4	4.31	14	1.0	40
7	5.63	15	1.5	60
8	5.63	21	2.0	80
9	5.63	32	3.0	120

**FIBER COMPATIBILITIES**

FIBERS	COMPATIBILITY*					
	Weak Acids	Strong Acids	Weak Alkali	Strong Alkali	Solvents	Temperature °F Max.
Polyester	Very Good	Good	Good	Poor	Good	300°
Polypropylene	Excellent	Excellent	Excellent	Excellent	Fair	300°


\*use chart as a guide only. Chemical compatibility should be checked for specific fluid.

**ORDERING INFORMATION**

<p><b>TYPE FIBER</b>                  PEMF = MICROFIBER, POLYESTER                  POMF = MICROFIBER, POLYPROPYLENE                  OR = MICROFIBER, POLYPROPYLENE OIL REMOVAL                  PEMFXL = MICROFIBER, POLYESTER EXTENDED LIFE                  POMFXL = MICROFIBER, POLYPROPYLENE EXTENDED LIFE                  ORXL = MICROFIBER; POLYPROPYLENE OIL REMOVAL EXTENDED LIFE</p> <p><b>MICRON RATINGS</b>                  PEMF or PEMFXL = 1.0, 2.5, 5.0, 10.0, 25.0                  POMF or POMFXL = 1.0, 2.5, 5.0, 10.0, 25.0                  OR or ORXL = 15.0, 25.0</p> <p><b>BAG COVER</b>                  PE = POLYESTER COMPOSITE (STANDARD ON PEMF)                  PO = SPUN BONDED POLYPROPYLENE (STANDARD ON POMF)</p> <p><b>BAG SIZE</b>                  1, 2, 3, 4, 7, 8, 9</p> <p><b>BAG STYLES</b>                  S = GALVANIZED CARBON STEEL RINGS                  S-SS = STAINLESS STEEL RINGS                  POL = MOLDED POLYPROPYLENE TOP (SIZE 1 &amp; 2 ONLY)                  PEL = MOLDED POLYESTER TOP (SIZE 1 &amp; 2 ONLY)</p>	PEMFXL   1.0   PE   2   S
--	---------------------------

**PRESSURE DROP DATA**

The graph shows the delta P produced by a # 2 size bag for water, 1 cps @ 68° F. The pressure drop is specific to the type of bag, the micron rating and flow rate for the filter bag only. It does not include the pressure drop caused by the housing & basket. Max. delta P 1,5 bar.

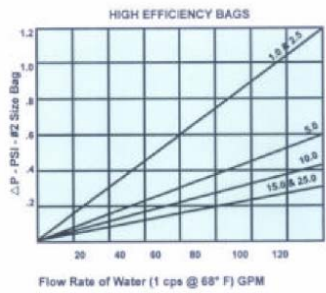

Bea Technologies reserves the right to alter specifications without prior notice.

**BAG SIZE CORRECTION**

Bag Size	Correction Factor
1	2.25
2	1.00
3	9.00
4	4.50
7	3.00
8	2.25
9	1.50

**VISCOSITY CORRECTION**

Viscosity CPS	Correction Factor
50	4.5
100	8.3
200	16.6
400	27.7
800	50.0
1000	56.2
1500	77.2
2000	113.6
4000	161.0
6000	250.0
8000	325.0
10,000	430.0

For other than #2 size bags, multiply delta P from above table by the bag size correction factor below to calculate delta P. If viscosity of the liquid is greater than 1 cps (water @ 68° F), multiply the result by the proper viscosity correction factor.

DS-PEM-656-UK-05-0

