


## OIL SEPARATOR FILTER ELEMENT MOD. W11-85.607-02-P05

Coalescing filter element to remove oil from compressed gases in refrigeration plants:

### Technical Characteristics

<b>FILTER MEDIA:</b>	borosilicate microfibers
<b>MEDIA ARRANGEMENT:</b>	pleated multilayers
<b>FILTERING SURFACE:</b>	2700 cm <sup>2</sup>
<b>DRAINING BARRIER:</b>	between metallic core and cage
<b>METALLIC SUPPORTS:</b>	Inox
<b>END CAPS:</b>	Aluminium
<b>WEIGHT:</b>	2,0 Kg
<b>MAX. OPERATING TEMPERATURE :</b>	120 °C
<b>MAX. DIFFERENTIAL PRESSURE IN-OUT:</b>	3 bar
<b>PRESSURE DROP:</b>	0,2 bar ( at saturated condition )
<b>RESIDUAL OIL CONTENT AT 20 °C:</b>	0,1 ppm ( assuming <20 ppm @ inlet)
<b>PARTICLE SIZE REMOVAL:</b>	0,3 micron @ 99,99%
<b>GAS COMPATIBILITY:</b>	Freon / Ammonia / Natural gas
<b>GASKETS:</b>	N° 1 Neoprene OR
<b>FLOW RATE DIRECTION:</b>	from inside to outside

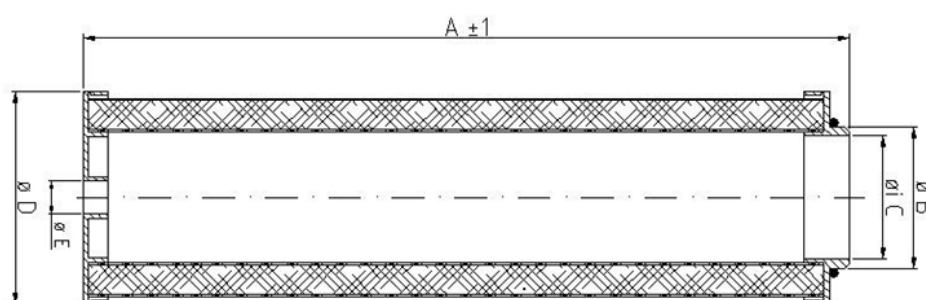

Dimensions mm				
A	B	C	D	E
617	57	50	86	13

Data contained in this bulletin are informative and subject to change without notice.  
User is responsible for determining whether the product is fit for particular purpose and suitable for User's method of application.