

POLYSAN MINI-CARTRIDGES

- High dirt holding capacity
- Steamable and sanitizable
- EC-listed materials for Food contact
- FDA-listed materials per CFR21
- Validation guide on request (only PH grade)



POLYSAN MINI-CARTRIDGE is obtained by pleating up to 5 polypropylene layers of decreasing porosity to achieve high effective filtration area, high dirt holding capacity with efficiency higher than 99.98%.

All the components in polypropylene are assembled by thermowelding process. MINI-CARTRIDGE is well suited in all applications where small flow rate is involved and precision filter rating is required; PH grade is prefluxed with non-pyrogenic water and suitable for pharmaceutical applications.

MATERIALS OF CONSTRUCTION

Filter media	polypropylene
Upstream supports	polypropylene
Downstream supports	polypropylene
Internal core	polypropylene
External cage	polypropylene
End caps/adapters	polypropylene

FOOD-SAFETY

POLYSAN filter element materials meet (EU) regulation 10/2011 and its amendments, regulations (EC) 1935/2004 and 1895/2005.

BIO-SAFETY



Filter media and components pass USP Biological Reactivity and Chemical-Physical tests for CLASS VI plastics.
Specific for "PH" grade: the filter meets USP "Water for injection" requirements for particle release and the effluent is Non-Pyrogenic per USP Bacterial Endotoxins (< 0,25 EU/ml).

OPERATING CONDITIONS

- max. continuous temperature	65 °C
- regeneration	2% NaOH solution at room temperature
- sterilization with steam	continuously with cycles of 20 minutes at 121 °C
- sanitization with hot water	80 °C max
- sanitization with chemicals	Can be sanitized by standard chemical agents
- max. differential pressure	5,0 bar at 25 °C
- recommended change out differential pressure	2,0 bar at 25 °C

CODE	FILTRATION RATING µm	MAX WATER FLOW RATE FOR CARTRIDGE l/h
KD	0,6	130
KF	1,2	200
KG	2,5	500
KL	4,5	750
KR	6,5	1000
KS	10,0	1000
KT	20,0	1000

WATER FLOW RATE FOR CARTRIDGE SIZE 1001

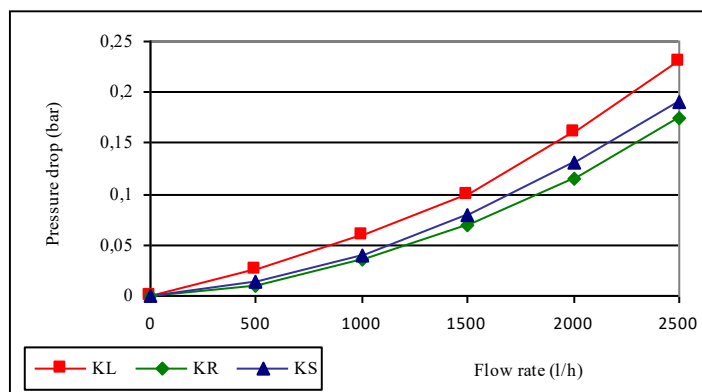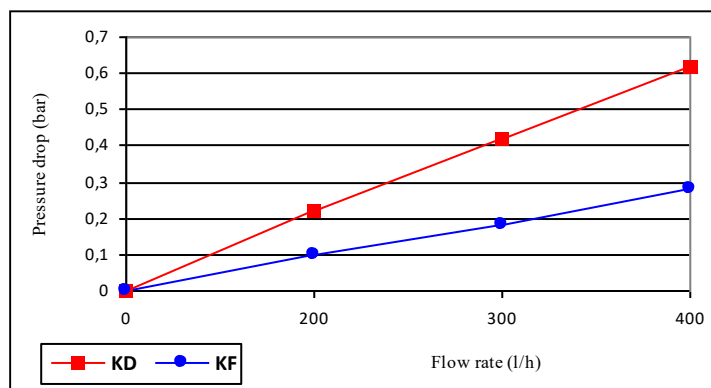

POLYSAN 1001 ORDERING INFORMATION

PKP -

100

1

-

KR

-

[]

[]

END FITTING	CODE
S.O.E.: open end with internal o-ring 2.116	100
S.O.E.: open end with threaded 1/2" adapter	120

NOMINAL LENGTH	CODE
135 mm	1
142 mm Threaded end included	05

FILTRATION RATING μm	CODE
0,6	KD
1,2	KF
2,5	KG
4,5	KL
6,5	KR
10,0	KS
20,0	KT

CODE	DESCRIPTION
No code	General Grade
PH	Prefluxed with non-pyrogenic water; Quality Certification in the box.

CODE	GASKETS	
No code	Standard	Silicone
E	On request	EPDM
T	On request	TEFLON

The data are informative and subject to change without notice. User is responsible for determining whether the product is fit for particular purpose and suitable for User's method of application.

Bea Technologies Spa

Via Newton,4 -20016 Pero (MILANO) Italy
 Tel.+(39) 02 339271 / Fax+(39) 02 3390713
 mail:info@bea-italy.com
 web:www.bea-italy.com

LY-PKP1-1040-EN-P6ST