

STARLIFE

- High chemical compatibility
- Wide range of filtration ratings
- Available in several configurations
- Thermowelded construction up to 40"
- EC-listed materials for Food contact
- FDA-listed materials per CFR21



STARLIFE is a depth filter integrally manufactured with polypropylene. The filter media is obtained by Melt-Blown process technology; the microfibers with a precise and controlled diameter are thermally bounded in order to obtain a porosity decreasing from external, to obtain high dirt holding capacity with low filtration cost. The strongly bounded microfibers provide high resistance to pressure drop increase and preserve constant flow rate.

The high chemical compatibility of the polypropylene allows the use from industrial general applications to Food&Beverage applications.

MATERIALS OF CONSTRUCTION

Filter media	polypropylene
Internal Core	polypropylene
External Cage	no cage
End caps / Adapters	polypropylene

FOOD-SAFETY



STARLIFE filter element material meet (EU) regulation 10/2011 and its amendments, regulations (EC) 1935/2004 and 1895/2005.

OPERATING CONDITIONS

- max. continuous temperature	65 °C
- sanitization with hot water	70 °C max
- max. differential pressure	4,0 bar at 25 °C
- recommended change out differential pressure	2,0 bar at 25 °C

CODE	FILTRATION RATING (µm)	MAX. FLOW RATE FOR 10" CARTRIDGE (l/h)
A5	0,5	200
01	1,0	500
03	3,0	900
05	5,0	2200
10	10,0	3000
20	20,0	3000
25	25,0	3000
50	50,0	3000
75	75,0	3000
100	100,0	3000

WATER FLOW RATE FOR 10" CARTRIDGE

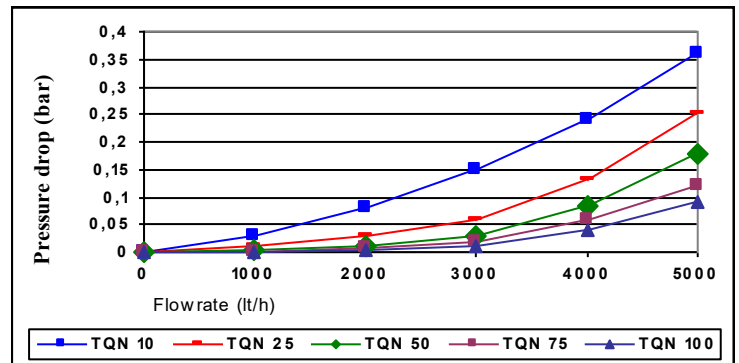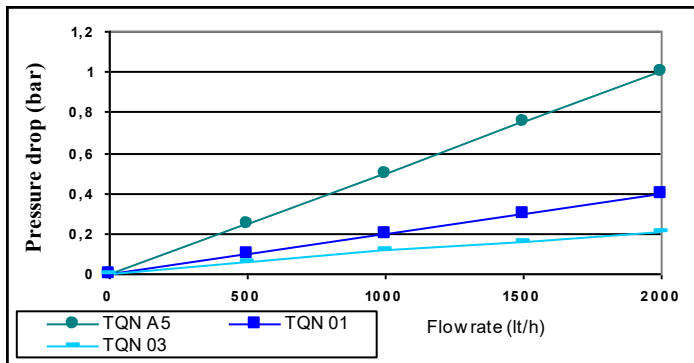

STARLIFE ORDERING INFORMATION

TQN - 01 - 10 - 05 - Z -

EXTERNAL DIAMETER	END FITTING	CODE
66 mm	DOE: double open end with flat gasket.	01
	SOE: open end with (2) O-Ring 2.222. Blind end with flat top.	03
	SOE: open end with (2) O-Ring 2.226 and 2 bayonet locks. Blind end with fin.	07
	SOE: open end with (2) O-Ring 2.222. Blind end with fin.	08
63 mm	DOE: double open end without gaskets.	00

FILTRATION RATING	CODE
0,5 µm	A5
1,0 µm	01
3,0 µm	03
5,0 µm	05
10,0 µm	10
20,0 µm	20
25,0 µm	25
50,0 µm	50
75,0 µm	75
100,0 µm	100

CODE	GASKETS	END FITTING CODE
No code	NONE	00
No code	Buna	01
S	Silicone	
E	EPDM	
V	Viton	03
N	Buna	
S	Silicone	
E	EPDM	
V	Viton	08

CODE	NOMINAL LENGTH
09	9 3/4"
10	10"
20	20"
29	29 1/4 "
30	30"
39	39"
40	40"
41	41"

CODE	DESCRIPTION
Z	No external cage

Data contained in this bulletin are informative and subject to change without notice.
 User is responsible for determining whether the product is fit for particular purpose and suitable for User's method of application.



Bea Technologies Spa Via Newton, 4 - 20016 Pero (Milano) ITALY
 Tel +39 02 339271 FAX +39 02 3390713 e-mail: info@bea-italy.com
 web: www.bea-italy.com

LY-TQN1-1020-EN-D6FB